



QFX IT-437 Battery Replacement

This is a step-by-step guide on how to replace the battery in the QFX IT-437 tablet.

Written By: Douglas





TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Picks set of 6](#) (1)
-

Step 1 — Battery




- Begin the process by using a PH00 Phillips screw driver.
- Remove the two 1.2mm x 3mm screws at the bottom of the tablet.


Step 2

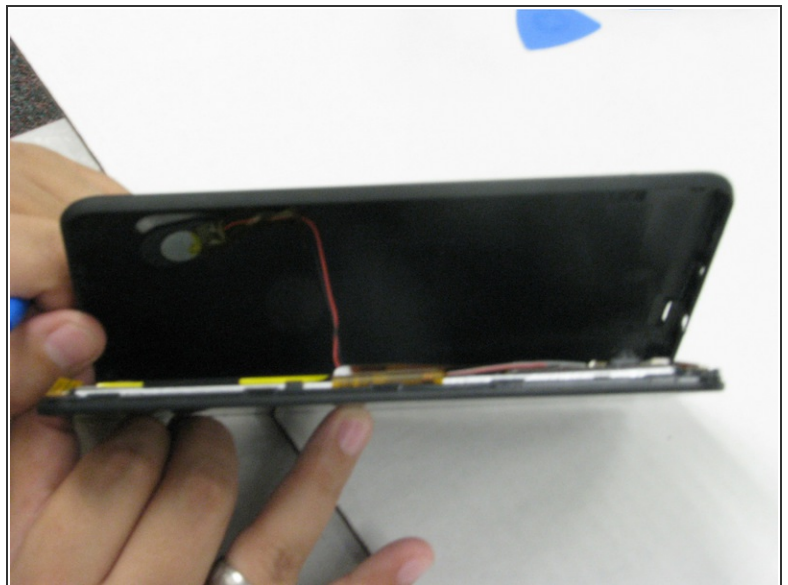

- Use the iFixit plastic opening tool to pry open the back of the tablet.

 Do not remove the back case completely as tape has to be removed from the wires, and pulling the case apart can tear off the wires.

Step 3

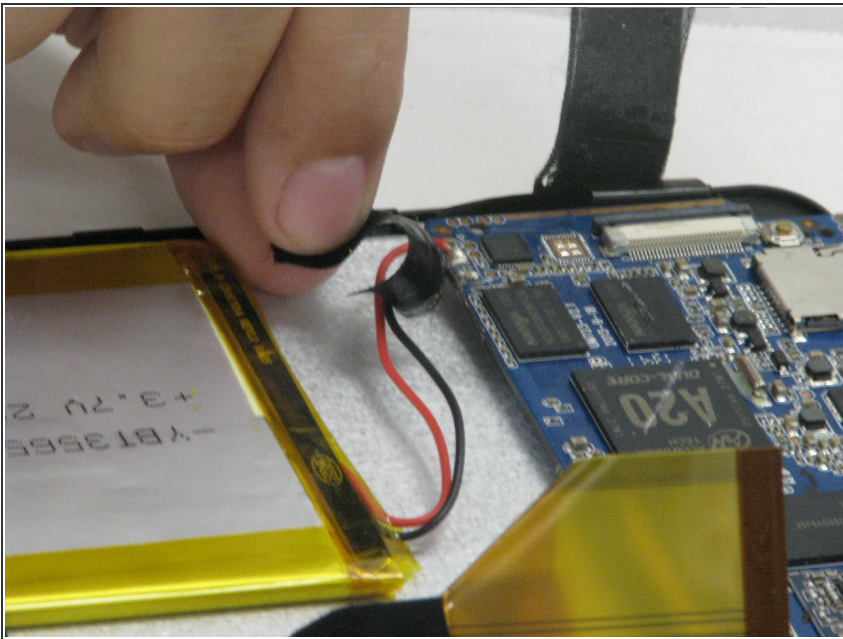

- Remove the tape connecting the battery to the motherboard.
- ⓘ Save the tape in good condition for the replacement so the wires do not get stuck in the case.

Step 4



- Remove the black tape attaching the wires to the battery.

Step 5



- Use the plastic opening pick in order to remove the battery from the tablet, and set it aside for the replacement.
- ☛ The removed wires will have to be soldered back on to the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-10 04:22:04 AM.